



ADVANCED
ENGINEERING

Clean Cut FR

Scissor Cut for Field Installation, Will Not Support Combustion

CCF has all of the same qualities that make our standard CC so easy to cut and install, with the added advantage of a flame inhibitor to provide an extra level of safety in certain applications.

Under normal conditions, CCF will quickly self-extinguish and minimize flame spread and incidental damage to surrounding components.


The combination of flame retardance, ease of installation and nearly complete coverage makes CCF an ideal solution for many industrial and engineering applications.

- **Scissor Cut For Easy Installation**
- **Mil-202, FAR 25 VW-1, FR-1 Approved**
- **Cut & Abrasion Resistant**
- **Expands For Ease Of Installation**
- **Halogen Free**
- **Temp Range -75°C to 125°C**
- **Melt Temp 250°C**



Pro AV installers can incorporate CCF into cabling designs for concert, studio and nightclub installations.

Nominal Size	Part #	Expansion Range		Standard Spool Put-Ups		Available Colors	Lbs/100'
		Min.	Max.	Bulk Spool	Mini Spool		
1/8"	CCF0.13	1/8"	1/4"	1,000'	100'	2 in-stock colors	.396
1/4"	CCF0.25	5/32"	7/16"	1,000'	100'	2 in-stock colors	.464
3/8"	CCF0.38	3/16"	5/8"	500'	100'	2 in-stock colors	.744
1/2"	CCF0.50	1/4"	3/4"	500'	100'	2 in-stock colors	.822
3/4"	CCF0.75	5/8"	1"	250'	75'	2 in-stock colors	1.113
1"	CCF1.00	3/4"	1 3/16"	250'	50'	2 in-stock colors	1.236
1 1/4"	CCF1.25	1"	1 1/2"	250'	50'	2 in-stock colors	1.555
1 1/2"	CCF1.50	1 1/4"	2"	250'	50'	2 in-stock colors	1.850

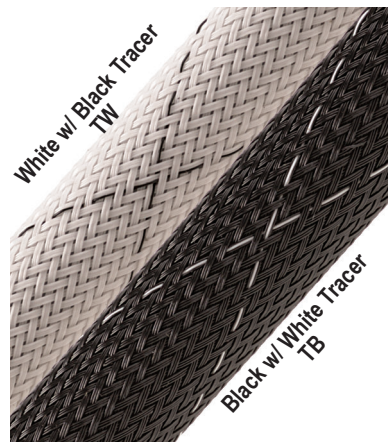

800.746.7655
www.cablemarkers.com